




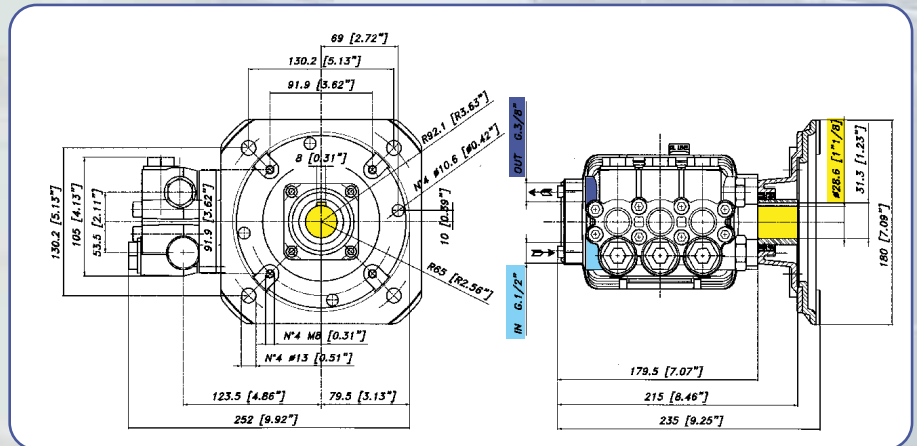


highest state PRECISION QUALITY OF THE ART highest customized QUALITY PRECISION

CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	\varnothing	1/2 BSP
	PRESS.	Min.	- 0.1 bar - 1.5 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	\varnothing	3/8 BSP
SHAFT		\varnothing	HOLLOW 1" 1/8
OIL		SAE 75W 90	0.7 litri 0.18 U.S.G.
PESO WEIGHT		Kg / lbs	10.8 / 23.7



M - NEMA 184TC-1"1/8



TMH 1725 rpm

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

CODICE PART NR.	MODELLO MODEL	PRESS MAX / MAX PRESSURE		PORTATA / FLOW		POTENZA / POWER		PIST. PLUNG. Dia. mm	CORSA STROKE mm
		Bar	PSI	L/min	GPM	KW	HP		
07.1300.97.A	TMH 3036	210	3000	13.2	3.5	5.5	7.5	18	11.2
07.1301.97.A	TMH 3040	210	3000	15.2	4	5.9	8	18	12.4
07.1302.97.A	TMH 2250	150	2200	18.9	5	5.5	7.5	18	15.4
07.1303.97.A	TMH 3050	210	3000	18.9	5	7.4	10		
07.1304.97.A	TMH 1955	130	1900	20.8	5.5	5.5	7.5	18	17
07.1305.97.A	TMH 3055	210	3000	20.8	5.5	8.1	11		